


LOW PROFILE BOLT-DOWN ALL STAINLESS RANGE

- 4 Base and stud in stainless steel type 303
- 4 Superior quality and strength
- 4 Ideal for hygienic environments such as pharmaceutical, food preparation, medical and marine
- 4 Special options - non slip nitrile pad bonded to base - vibration dampening pad bonded to base - hygienic plastic seal cover for ball and socket joint

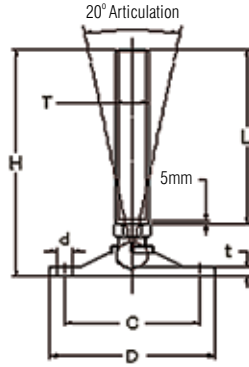

Bolt-Down Base

FTM


BASE DIA (D)	THREAD (T)	STUD LENGTH (L)	OVERALL HEIGHT (H)	HOLE CENTRES (C)	FLANGE THICKNESS (t)	HOLE DIA (d)	MAX LOAD (KG)	PART NO
50	M8	60	82	40	4	5.5	300	FTM050/08060/SSB
50	M10	75	97	40	5	5.5	500	FTM050/10075/SSB
50	M12	75	100	40	4	5.5	750	FTM050/12075/SSB
60	M12	75	100	50	5	5.5	1250	FTM060/12075/SSB
60	M12	125	150	50	5	5.5	1250	FTM060/12125/SSB
80	M16	75	106	68	6	6.5	1750	FTM080/16075/SSB
80	M16	125	156	68	6	6.5	1750	FTM080/16125/SSB
80	M16	150	181	68	6	6.5	1750	FTM080/16150/SSB
100	M16	125	158	82	6.5	9	2500	FTM100/16125/SSB
100	M16	150	183	82	6.5	9	2500	FTM100/16150/SSB
100	M16	200	233	82	6.5	9	2500	FTM100/16200/SSB
100	M20	125	164	82	6.5	9	2500	FTM100/20125/SSB
100	M20	150	189	82	6.5	9	2500	FTM100/20150/SSB
100	M20	200	239	82	6.5	9	2500	FTM100/20200/SSB
120	M20	150	191	100	7.5	11	3750	FTM120/20150/SSB
120	M20	200	241	100	7.5	11	3750	FTM120/20200/SSB
120	M24	125	181	100	7.5	11	3750	FTM120/24125/SSB
120	M24	150	206	100	7.5	11	3750	FTM120/24150/SSB
120	M24	200	256	100	7.5	11	3750	FTM120/24200/SSB

SPECIAL OPTIONS



We welcome your enquiries for specially manufactured adjusters to suit specific applications. Advice and design assistance is available, and economically priced solutions offered. Please call for details.

Heavy duty threaded tube inserts in reinforced nylon with threads in stainless, or brass plated mild steel. Tube sizes 30 x 30 x 1.5 to 50 x 50 x 2.0, threads M10-M24



Low profile stainless steel adjuster with standard nitrile pad



Standard Base all stainless adjuster